


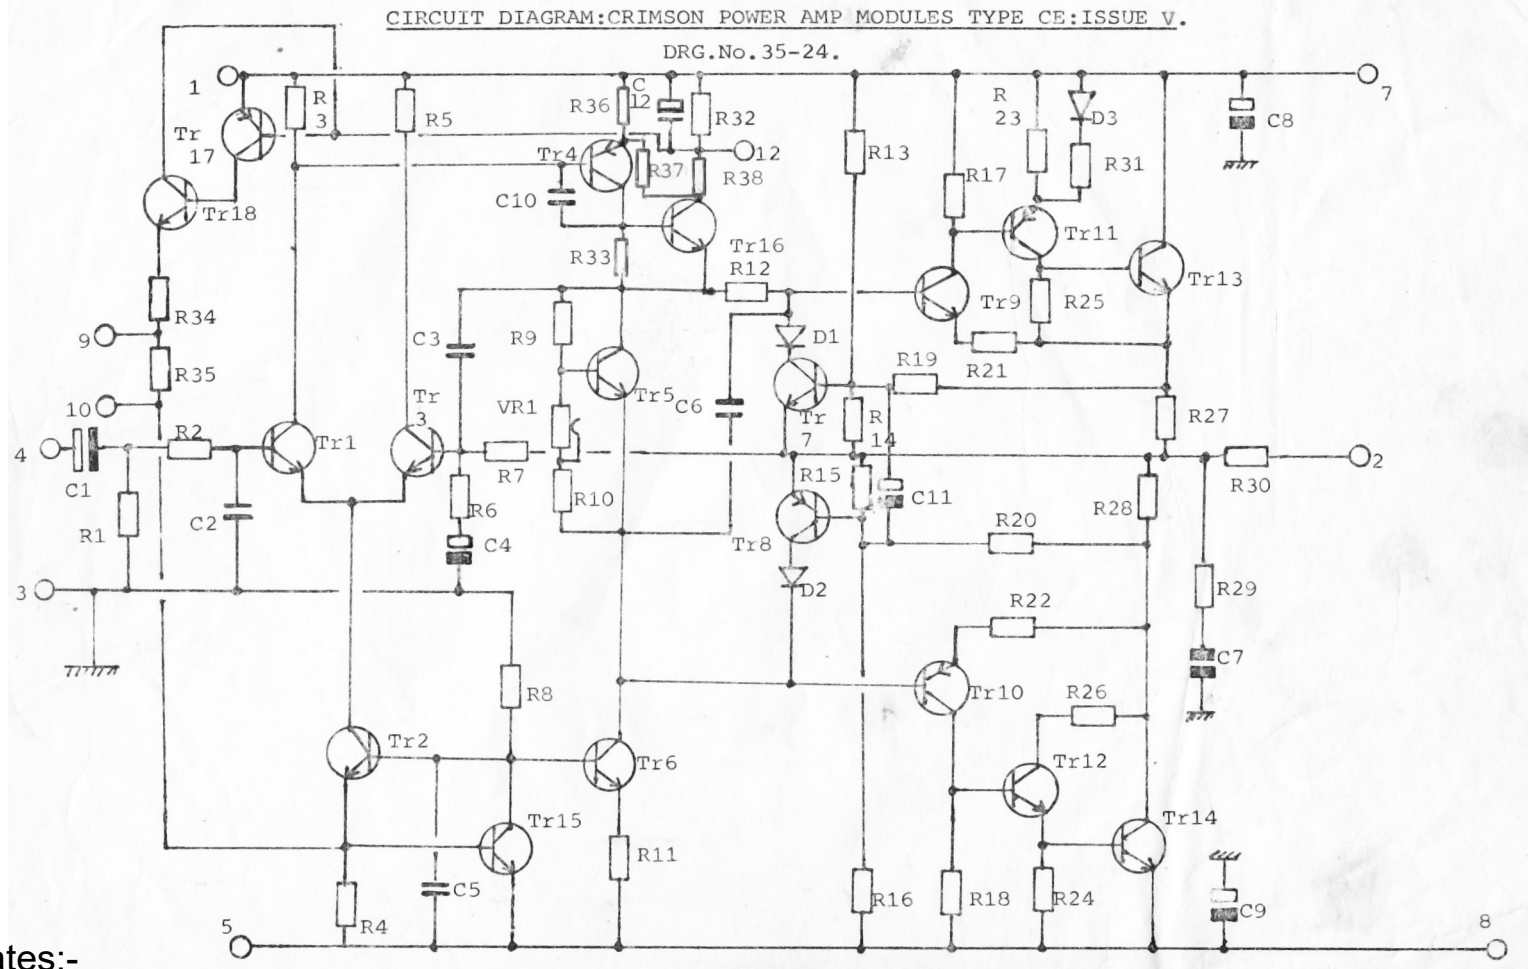

2025 updates:-

- 1 R32 to BAT83 series 56k
- 2 R37 to 180R
- 3 C12 to 15uF(opt)
- 4 R30 to 4uH parallel 2R2 1W
- 5 R7 fit 10pF para.1206 under
- 6 Tr1,3 to ZTX696B
- 7 R9 to 12k & R10 to 10k
- 8 Tr5 to high Hfe note collector orientation and glue to driver

Renew all electrolytics C4 100uF
Set Iq pos rail (+/-45v rails) to 17mA 2
minutes. C11 best removed.